

Roll-Out Dry Ridge System - Batten Support Bracket

CODE **GDRR-BS**

Product Codes:


Support Bracket	GDRR-BS
------------------------	----------------

Description


Made from galvanised steel, manufactured to BS EN 1461:1999, the Manthorpe Batten Support Bracket provides a steady, secure platform for the horizontal ridge batten at the apex of the rafters, when fitting the Manthorpe Dry Ridge system. The brackets have four different bend points to accommodate a range of roof pitches and tile heights and are designed to hold a single length of 25 x 38mm batten. One bracket should be placed at the apex of each rafter along the ridge.

The bracket should be secured to the rafter through the nail holes on each of the two legs. At least two nails should be used on each leg of the bracket, these must be stainless steel annular ring shanked nails at a length of 30mm.

The Batten Support Bracket forms part of Manthorpe's Dry Ridge System which can be purchased as a kit, with all the parts required to cover a run of approximately 6 metres.

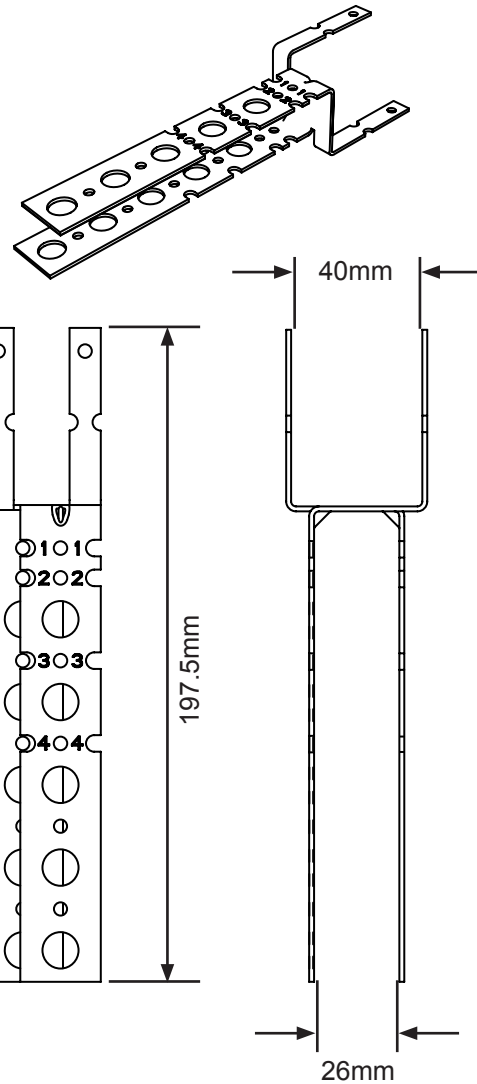

Fixing:

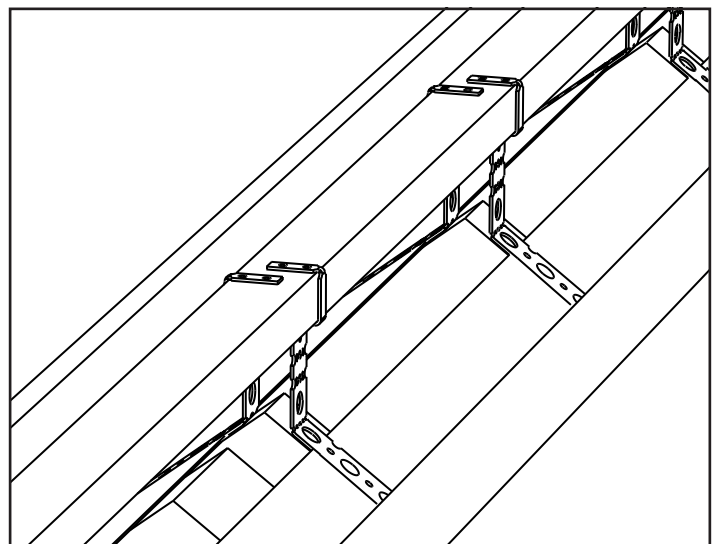

Packing Details

Dry Ridge Pack contains 10 Batten Support Brackets.

Weight

0.089 kg each

Materials

Galvanized Steel

Manufacturing Process

Pressed

References

BSI: British Standard 5534:2003
 BSI: British Standard 6399-2:1997
 NHBC Standards Chapter 7.2

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200
 FAX: 01773 514 262
 EMAIL: sales@manthorpe.co.uk
 WEB www.manthorpe.co.uk

DRN B.H

Date 02/04/08

DRG No

MBP 8267

Issue

B

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.