


Roll-Out Dry Ridge System - 6m Vent Roll

CODE **GDRR-RR**

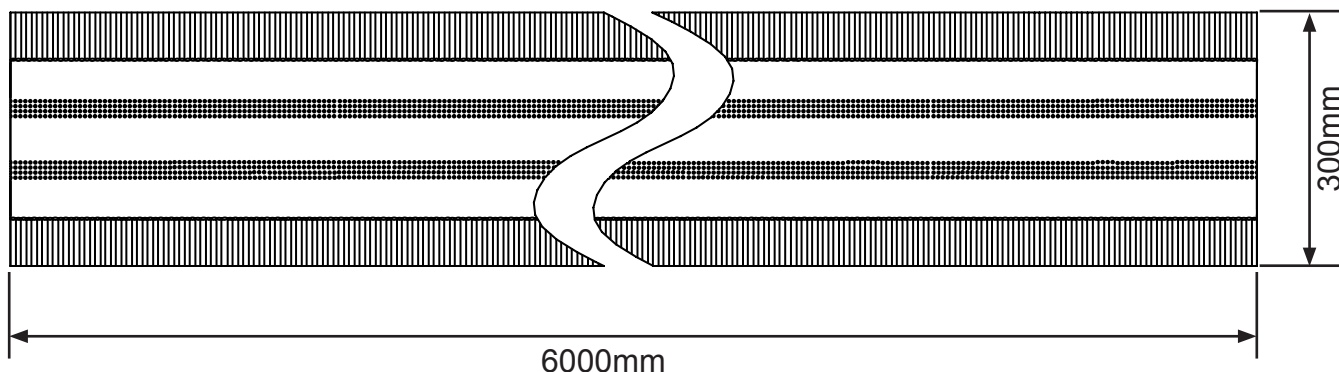

Product Codes:

6m Vent Roll

GDRR-RR

Description

Supplied in lengths of 6 metres, the Ridge Roll is placed along the length of the ridge prior to the ridge tiles being installed.

The roll is made up of a vapour permeable membrane down the centre, with a corrugated acrylic coated aluminium strip down each edge.


The malleability of the aluminium allows the roll to be shaped to the profile of the roof tiles and is secured in place with a butyl strip already attached to the underside.

When installing, the protective cover must be removed to expose the tacky butyl, which will adhere to the surface of the tiles when firmly pressed down.

The punched vapour permeable membrane will provide ventilation to the roof void of 5000mm²/m whilst avoiding the ingress of wind driven rain and the entry of large insects.

The Ridge Roll forms part of Manthorpe's Dry Ridge System which can be purchased as a kit, with all the parts required to cover a run of approximately 6 metres.

Fixing:

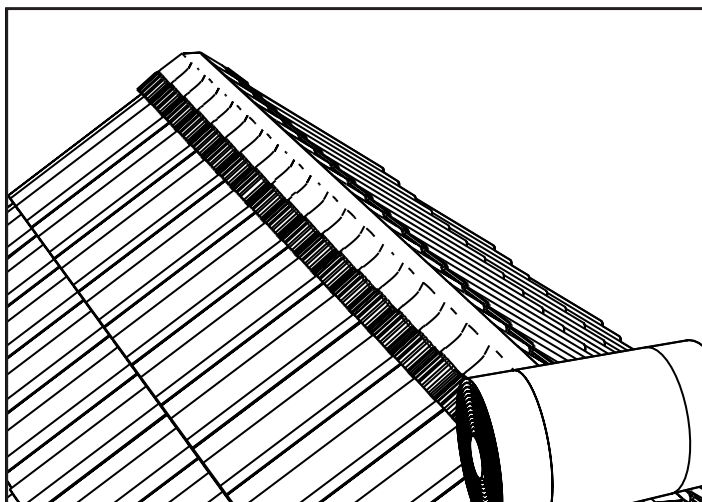

References

BSI: British Standard 5534:2003
 BSI: British Standard 6399-2:1997
 NHBC Standards Chapter 7.2

Weight	1.070 kg
Materials	Acrylic Coated Aluminium
Manufacturing Process	Pressed & Fabricated
Colour Variations	Black (BL) Dark Brown (BR) Terracotta (TR)

MANTHORPE BUILDING PRODUCTS LTD
 MANTHORPE HOUSE
 BRITAIN DRIVE
 CODNOR GATE BUSINESS PARK
 RIPLEY
 DERBYSHIRE DE5 3ND

TEL: 01773 514 200
 FAX: 01773 514 262
 EMAIL: sales@manthorpe.co.uk
 WEB: www.manthorpe.co.uk

DRN B.H

Date 02/04/08

DRG No

MBP 8268

Issue

B

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.